



# FRONT SOFTRIDE® LEAF SPRINGS

**Softride® Technology** gives you all the vigorous off-road handling needed while providing the smooth street riding characteristics that you demand. Skyjacker's advanced method of shotpeening, tapered, leaves, Teflon® wear pads and 'presetting' process achieves articulation at its best...without sacrificing the life of the spring. From this chart, you can find a 'Pair of Springs with Bushings' or 'Single Springs' and the 'Bushing Sets' needed for the Single unit (Ordered Separately). Also available are '**Fitted Leafs**'. Fitted Leafs are designed as an option Exclusively for Skyjacker® Softride® Lifted Leaf Springs. These are used when the additional weight of aftermarket accessories are installed such as a heavy winch bumper, an engine conversion, a swing-away tire carrier, all your extra gear, etc.).

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>CHEVROLET/GMC</b>						
<b>73-87 1/2 &amp; 3/4 Ton Pickup 4WD</b>						
2.5"		C125S	2	SE11C	1	FLC125
4"		C140S	2	SE11C	1	FLC140
6"		C160S	2	SE11C	1	FLC160
8"		C180S	2	SE11C	1	FLC180
<b>67-72 1/2 &amp; 3/4 Ton Pickup 4WD</b>						
2.5"		C225S	2	SE11C	1	FLC225
4"		C240S	2	SE11C	1	FLC240
6"		C260S	2	SE11C	1	FLC260
8"		C280S	2	SE11C	1	FLC280
<b>77-87 1 Ton Pickup</b>						
2.5"		C125S	2	SE11C	1	FLC125
4"		C140S	2	SE11C	1	FLC140
6"		C160S	2	SE11C	1	FLC160
8"		C180S	2	SE11C	1	FLC180
<b>88-91 Blazer, Jimmy - Full-Size</b>						
2.5"		C125S	2	SE17C	1	FLC125
4"		C140S	2	SE17C	1	FLC140
6"		C160S	2	SE17C	1	FLC160
8"		C180S	2	SE17C	1	FLC180
<b>73-87 Blazer, Jimmy - Full-Size</b>						
2.5"		C125S	2	SE11C	1	FLC125
4"		C140S	2	SE11C	1	FLC140
6"		C160S	2	SE11C	1	FLC160
8"		C180S	2	SE11C	1	FLC180
<b>67-72 Blazer, Jimmy - Full-Size</b>						
2.5"		C225S	2	SE11C	1	FLC225
4"		C240S	2	SE11C	1	FLC240
6"		C260S	2	SE11C	1	FLC260
8"		C280S	2	SE11C	1	FLC280
<b>88-91 Suburban 1/2 &amp; 3/4 Ton 4WD</b>						
2.5"		C125S	2	SE17C	1	FLC125
4"		C140S	2	SE17C	1	FLC140
6"		C160S	2	SE17C	1	FLC160
8"		C180S	2	SE17C	1	FLC180
<b>73-87 Suburban 1/2 &amp; 3/4 Ton 4WD</b>						
2.5"		C125S	2	SE11C	1	FLC125
4"		C140S	2	SE11C	1	FLC140
6"		C160S	2	SE11C	1	FLC160
8"		C180S	2	SE11C	1	FLC180
<b>67-72 Suburban 1/2 &amp; 3/4 Ton 4WD</b>						
2.5"		C225S	2	SE11C	1	FLC225
4"		C240S	2	SE11C	1	FLC240
6"		C260S	2	SE11C	1	FLC260
8"		C280S	2	SE11C	1	FLC280
<b>DODGE</b>						
<b>61-93 1/2 &amp; 3/4 Ton Pickup 4WD</b>						
2.5"		D200S	2	SE12D	1	FLD200
4"		D400S	2	SE12D	1	FLD400

# FRONT SOFTRIDE® LEAF SPRINGS

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>DODGE - Continued</b>						
<b>61-93 1/2 &amp; 3/4 Ton Pickup 4WD</b>						
6"		D600S	2	SE12D	1	FLD600
8"		D800S	2	SE12D	1	FLD800
<b>87-93 3/4 &amp; 1 Ton Pickup 4WD with Diesel Engine</b>						
1"		D100CS	2	SE12D	1	FLD200
2"		D200CS	2	SE12D	1	FLD400
4"		D400CS	2	SE12D	1	FLD600
6"		D600CS	2	SE12D	1	FLD800
<b>74.5-93 1 Ton Pickup 4WD with Gas Engine</b>						
1.5-2"		D200S	2	SE12D	1	FLD200
3-4"		D400S	2	SE12D	1	FLD400
5-6"		D600S	2	SE12D	1	FLD600
7-8"		D800S	2	SE12D	1	FLD800
<b>72-93 Ramcharger, Trailduster 4WD</b>						
2.5"		D200S	2	SE12D	1	FLD200
4"		D400S	2	SE12D	1	FLD400
6"		D600S	2	SE12D	1	FLD600
8"		D800S	2	SE12D	1	FLD800
<b>FORD</b>						
<b>00-04 Excursion 4WD with Gas Engine</b>						
4"		F920S	2	SE90F		
6"		F940S	2	SE90F		
8"		F960S	2	SE90F		
<b>00-04 Excursion 4WD with Diesel Engine</b>						
6"		F945S	2	SE90F		
8"		F965S	2	SE90F		
<b>99-04 F-250, F-350 Super Duty 4WD with Gas Engine</b>						
2"		F920S	2	SE90F		
4"		F940S	2	SE90F		
6"		F960S	2	SE90F		
8"		F965S	2	SE90F		
<b>99-04 F-250, F-350 Super Duty 4WD with Diesel Engine</b>						
1.5"		F920S	2	SE90F		
4"		F945S	2	SE90F		
6"		F965S	2	SE90F		
8"		F985S	2	SE90F		
<b>80-98 F-250 4WD</b>						
4"		F840S	2	SE80F	1	FLF840
6"		F860S	2	SE80F	1	FLF860
<b>77.5-79 F-250 4WD</b>						
4"		F724S	2	SE70F	1	FLF724
6"		F746S	2	SE70F	1	FLF746
<b>67-77 F-250 Highboy</b>						
2"		F724S	2	SE70F	1	FLF724
4"		F746S	2	SE70F	1	FLF746
<b>86-98 F-350 Straight Axle 4WD</b>						
3-4"		F840S	2	SE80F	1	FLF840
5-6"		F860S	2	SE80F	1	FLF860
<b>80-85 F-350 4WD</b>						
4"		F840S	2	SE80F	1	FLF840
6"		F860S	2	SE80F	1	FLF860
<b>79 F-350 Low Boy</b>						
3-4"		F724S	2	SE70F	1	FLF724
5-6"		F746S	2	SE70F	1	FLF746

# FRONT SOFTRIDE® LEAF SPRINGS

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>JEEP</b>						
<b>87-96 Wrangler YJ</b>						
2-2.5"		YJ20FS	2	SE4YJ	1	FLYJ20F
3.5"-4"		YJ40FS	2	SE4YJ	1	FLYJ40F
<b>87-96 Wrangler YJ Rock Ready® Double Military Wrap</b>						
2.5"		YJ25FS	2	SE45YJ		
4"		YJ45FS	2	SE45YJ		
<b>76-86 CJ &amp; Scrambler</b>						
2-2.5"		J20FS	2	SE40J	1	FLJ20F
3.5"-4"		J40FS	2	SE40J	1	FLJ40F
<b>55-75 CJ</b>						
2-2.5"		J32FS	2	SE34J	1	FLJ32F
3.5"-4"		J34FS	2	SE34J	1	FLJ34F
<b>84-91 Grand Wagoneer 4WD - Full-Size</b>						
3.5-4"		JP40FS	2	SE4JP	1	FLJP40F
<b>74-83 Cherokee, Wagoneer 4WD - Full-Size</b>						
3.5-4"		JP40FS	2	SE4JP	1	FLJP40F
<b>74-88 J10, J20 Pickup 4WD - Full-Size</b>						
3.5-4"		JP40FS	2	SE4JP	1	FLJP40F
<b>TOYOTA</b>						
<b>79-85 Pickup &amp; 4Runner 4WD</b>						
3"		T303S	2	SE30T	1	FLT303
5"		T305S	2	SE30T	1	FLT305
7"		T307S	2	SE30T	1	FLT307
<b>64-80 FJ40 LandCruiser 4WD</b>						
2.5"		L20FS	2	SE40L	1	FLL20F
4"		L40FS	2	SE40L	1	FLL40F
<b>INTERNATIONAL</b>						
<b>72-82 Scout II, Terra, Traveler 4WD</b>						
2"		S20FS	2	SE40S	1	FLS20F
4"		S40FS	2	SE40S	1	FLS40F

# REAR SOFTRIDE® LEAF SPRINGS

**Softride® Technology** enhances every steely aspect of leaf spring performance, giving you all the vigorous off-road handling needed while providing the smooth street riding characteristics that you demand. Skyjacker's advanced method of shotpeening, tapered leaves, Teflon® wear pads and 'presetting' process achieves articulation at its best... without sacrificing the life of the spring. From this chart, you can find a 'Pair of Springs with Bushings' or 'Single Springs' and the 'Bushing Sets' needed for the Single unit (Ordered Separately). Also available are 'Fitted Leafs'. Fitted Leafs are designed as an option Exclusively for Skyjacker® Softride® Lifted Leaf Springs. These are used when the additional weight of aftermarket accessories are installed such as a heavy winch bumper, an engine conversion, a swing-away tire carrier, all you extra gear, etc.).

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>CHEVROLET/GMC</b>						
<b>99-10 1500 1/2 Ton Pickup 4WD</b>						
5"		CR55S	2	Pre-Installed Rubber		
<b>01-08 1500HD / 2500 Pickup 4WD</b>						
5"		CR75S	2	Pre-Installed Rubber		
<b>01-10 2500HD 3/4 &amp; 1 Ton Pickup 4WD</b>						
5"		CR75S	2	Pre-Installed Rubber		
<b>88-98 1/2, 3/4 Ton 6-Lug Pickup 4WD</b>						
5-5.5"		CR35S	2	Pre-Installed Rubber		FLCR35
<b>69-87 1/2, 3/4 Ton Pickup 4WD with 52" Rear Springs</b>						
2"		CR12S	2	Pre-Installed Rubber		FLCR12
4"		CR14S	2	Pre-Installed Rubber		FLCR14
6"		CR16S	2	Pre-Installed Rubber		FLCR16
8"		CR18S	2	Pre-Installed Rubber		FLCR18
<b>69-87 1/2 &amp; 3/4 Ton Pickup 4WD with 56" Rear Springs</b>						
4"		CR24S	2	Pre-Installed Rubber		FLCR24
6"		CR26S	2	Pre-Installed Rubber		FLCR26
<b>92-98 Blazer\Tahoe, Jimmy\Yukon 4WD</b>						
2"		CR12S	2	Pre-Installed Rubber		FLCR12
4"		CR14S	2	Pre-Installed Rubber		FLCR14
6"		CR16S	2	Pre-Installed Rubber		FLCR16
8"		CR18S	2	Pre-Installed Rubber		FLCR18
<b>73-91 Blazer, Jimmy 4WD</b>						
2"		CR12S	2	Pre-Installed Rubber		FLCR12
4"		CR14S	2	Pre-Installed Rubber		FLCR14
6"		CR16S	2	Pre-Installed Rubber		FLCR16
8"		CR18S	2	Pre-Installed Rubber		FLCR18
<b>69-72 Blazer, Jimmy 4WD</b>						
2"		CR14S	2	Pre-Installed Rubber		FLCR14
4"		CR16S	2	Pre-Installed Rubber		FLCR16
6"		CR18S	2	Pre-Installed Rubber		FLCR18
<b>92-99 Suburban 1/2, 3/4 Ton 6-Lug &amp; 8-Lug 4WD</b>						
2"		CR32S	2	Pre-Installed Rubber		FLCR32
<b>69-91 Suburban 4WD with 52" Rear Springs</b>						
2"		CR14S	2	Pre-Installed Rubber		FLCR14
4"		CR16S	2	Pre-Installed Rubber		FLCR16
6"		CR18S	2	Pre-Installed Rubber		FLCR18
<b>69-91 Suburban 4WD with 56" Rear Springs</b>						
4"		CR24S	2	Pre-Installed Rubber		FLCR24
6"		CR26S	2	Pre-Installed Rubber		FLCR26
<b>DODGE</b>						
<b>02-06 1/2 Ton Ram Pickup 4WD</b>						
5"		DR250S	2	Pre-Installed Rubber		
<b>94-01 1/2 &amp; 3/4 Ton Ram Pickup 4WD with 2.5" Wide Rear Springs</b>						
2"	Q7	DR56S	2	Pre-Installed Rubber		
4"		DR54S	2	Pre-Installed Rubber		FLDR54

# REAR SOFTRIDE® LEAF SPRINGS


FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>DODGE - Continued</b>						
<b>94-01 1/2 &amp; 3/4 Ton Ram Pickup 4WD with 2.5" Wide Rear Springs</b>						
6"		DR56S	2	Pre-Installed Rubber		
KIT NOTES: Q7. The Factory Block is Removed.						
<b>03-10 3/4 Ton Ram Pickup 4WD</b>						
4"		DR374S	2	Pre-Installed Rubber		
<b>94-01 3/4 Ton Heavy Duty &amp; 1 Ton Ram Pickup 4WD with 3" Wide Rear Springs</b>						
1-1.5"	Q7	DR76S	2	Pre-Installed Rubber		FLDR76
4"		DR74S	2	Pre-Installed Rubber		FLDR74
6"		DR76S	2	Pre-Installed Rubber		FLDR76
KIT NOTES: Q7. The Factory Block is Removed.						
<b>72-93 1/2 &amp; 3/4 Ton Pickup 4WD</b>						
4"	Q6	DR40S	2	Pre-Installed Rubber		FLDR40
6"	Q6	DR60S	2	Pre-Installed Rubber		FLDR60
KIT NOTES: Q6. Factory Block Can Be Removed to Reduce Lift 3.5" (Cummins Models will be 4-6" Less Lift). Some 3/4 & 1 Ton Models have 3/4" Spring Eye Bolts and REQUIRE Bushing Kit # SE17D.						
<b>72-93 Ramcharger, Trailduster 4WD</b>						
6"	Q6	DR40S	2	Pre-Installed Rubber		FLDR40
8"	Q6	DR60S	2	Pre-Installed Rubber		FLDR60
KIT NOTES: Q6. Factory Block Can Be Removed to Reduce Lift 3.5" (Cummins Models will be 4-6" Less Lift). Some 3/4 & 1 Ton Models have 3/4" Spring Eye Bolts and REQUIRE Bushing Kit # SE17D.						
<b>FORD</b>						
<b>09-10 F-150 4WD</b>						
4"		FR904S	2	Pre-Installed Rubber		
<b>04-08 F-150 4WD</b>						
4.5"		FR44S	2	Pre-Installed Rubber		FLFR44
<b>97-03 F-150 4WD Includes SuperCrew</b>						
5"		FR15S	2	Pre-Installed Rubber		
<b>73-96 F-100, F-150 4WD</b>						
2"		FR52S	2	Pre-Installed Rubber		FLFR52
4"	Q1	FR54S	2	Pre-Installed Rubber		FLFR54
6-8"	Q1	FR56S	2	Pre-Installed Rubber		FLFR56
KIT NOTES: Q1. Factory Block Can Be Removed on 4WD to Reduce Lift 2" on 80-86 Models or 3.25" on 73-79 Models.						
<b>80-96 F-100, F-150 2WD</b>						
2"		FR34S	2	Pre-Installed Rubber		
4"		FR36S	2	Pre-Installed Rubber		
<b>78-96 Bronco 4WD</b>						
2"		FR51S	2	Pre-Installed Rubber		FLFR51
4"		FR52S	2	Pre-Installed Rubber		FLFR52
6"		FR54S	2	Pre-Installed Rubber		FLFR54
8"		FR56S	2	Pre-Installed Rubber		FLFR56
<b>66-77 Bronco 4WD</b>						
4.5"		FR64S	2	Pre-Installed Rubber		FLFR64
<b>00-04 Excursion 4WD</b>						
4"		FR94S	2	Pre-Installed Rubber		
6"		FR96S	2	Pre-Installed Rubber		
8"		FR98S	2	Pre-Installed Rubber		
<b>80-98 F-250 4WD, 2WD</b>						
1-2"		FR52S	2	Pre-Installed Rubber		FLFR52
3-4"	Q1	FR54S	2	Pre-Installed Rubber		FLFR54
5-6"	Q1	FR56S	2	Pre-Installed Rubber		FLFR56
KIT NOTES: Q1. Factory Block Can Be Removed on 4WD to Reduce Lift 2" on 80-86 Models or 3.25" on 73-79 Models.						
<b>77.5-79 F-250 Lowboy 4WD</b>						
1-2"		FR52S	2	Pre-Installed Rubber		FLFR52
3-4"	Q3	FR54S	2	Pre-Installed Rubber		FLFR54

# REAR SOFTRIDE® LEAF SPRINGS

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
5-6"	Q3	FR56S	2	Pre-Installed Rubber		FLFR56
KIT NOTES: Q3. Factory Block Can Be Removed to Reduce Lift 3.25".						
<b>FORD - Continued</b>						
<b>08-10 F-250/F-350 Super Duty 4WD</b>						
4"		FR84S	2	Pre-Installed Rubber		
6"		FR86S	2	Pre-Installed Rubber		
8"		FR88S	2	Pre-Installed Rubber		
<b>99-07 F-250/F-350 Super Duty 4WD</b>						
4"		FR94S	2	Pre-Installed Rubber		
6"		FR96S	2	Pre-Installed Rubber		
8"		FR98S	2	Pre-Installed Rubber		
<b>66-77 F-250 Highboy 4WD</b>						
4"		FR74S	2	Pre-Installed Rubber		FLFR74
<b>79-98 F-350 4WD</b>						
1"		FR52S	2	Pre-Installed Rubber		FLFR52
3"		FR54S	2	Pre-Installed Rubber		FLFR54
5"		FR56S	2	Pre-Installed Rubber		FLFR56
<b>83-97 Ranger 4WD, 2WD</b>						
4"	Q2	FR34S	2	Pre-Installed Rubber		FLFR34
6"	Q2	FR36S	2	Pre-Installed Rubber		FLFR36
KIT NOTES: Q2. Factory Block Can Be Removed to Reduce Lift 2-3" Depending on Factory Block Size.						
<b>83-90 Bronco II 4WD, 2WD</b>						
4"		FR34S	2	Pre-Installed Rubber		FLFR34
6"		FR36S	2	Pre-Installed Rubber		FLFR36
<b>JEEP</b>						
<b>87-96 Wrangler YJ</b>						
2-2.5"		YJ20RS	2	SE4YJ	1	FLYJ20R
3.5"-4"		YJ40RS	2	SE4YJ	1	FLYJ40R
<b>87-96 Wrangler YJ Rock Ready® Double Military Wrap</b>						
2.5"		YJ25RS	2	SE45YJ	1	
4"		YJ45RS	2	SE45YJ	1	
<b>76-86 CJs &amp; Scrambler</b>						
2-2.5"		J20RS	2	SE45J	1	FLJ20R
3.5"-4"		J40RS	2	SE45J	1	FLJ40R
<b>55-75 CJs</b>						
2-2.5"		J32RS	2	SE34J	1	FLJ32R
3.5"-4"		J34RS	2	SE34J	1	FLJ34R
<b>84-01 Cherokee XJ 4WD, 2WD</b>						
2.5"		JC25RS	2	Pre-Installed Rubber		FLJC25R
5.5"	Q5	JC55RS	2	Pre-Installed Rubber		
7.5"	Q5	JC75RS	2	Pre-Installed Rubber		
KIT NOTES: Q5. Skyjacker Shackles # SH130 Are REQUIRED and included.						
<b>84-91 Grand Wagoneer 4WD - Full-Size</b>						
3-4"		JP40RS	2	Pre-Installed Rubber		FLJP40R
<b>76-83 Cherokee, Wagoneer 4WD - Full-Size</b>						
4"		JP40RS	2	Pre-Installed Rubber		FLJP40R
<b>74-88 J10, J20 Pickup 4WD - Full-Size</b>						
4"	Q8	JP40RS	2	Pre-Installed Rubber		FLJP40R
KIT NOTES: Q8. 74-75 Models MUST Have 131" Wheel Base & 7,200 lb. GVWR or more for Rear Springs to Fit.						
<b>TOYOTA</b>						
<b>07-10 Tundra 4WD</b>						
4-4.5"		TUR74S	2	Pre-Installed Rubber		
<b>05-09 Tacoma 4WD</b>						
1.5"-2"		TCR515S	2	Pre-Installed Rubber		

# REAR SOFTRIDE® LEAF SPRINGS

FRONT LIFT	NOTES	SINGLE Spring	Qty.	Bushing SETS To Fit 2 Single Springs	Qty.	FITTED LEAFS For Pair
<b>98-04 Tacoma 4WD, 2WD</b>						
2.5"		TCR25S	2	Pre-Installed Rubber		
<b>95-97 Tacoma 4WD, 2WD</b>						
3.5"		TR39S	2	SE39T	1	FLTR49
<b>TOYOTA - Continued</b>						
<b>89-95 Pickup 4WD</b>						
4"		TR49S	2	SE39T	1	FLTR49
<b>79-88 Pickup 4WD</b>						
2"		TR20S	2	SE35T	1	FLTR20
4"		TR40S	2	SE35T	1	FLTR40
6"		TR60S	2	SE35T	1	FLTR60
<b>85-89 4Runner 4WD</b>						
0-1"		TR20S	2	SE35T	1	FLTR20
<b>85-89 4Runner 4WD</b>						
2-3"		TR40S	2	SE35T	1	FLTR40
4-5"		TR60S	2	SE35T	1	FLTR60
<b>64-80 FJ40 LandCruiser 4WD</b>						
2.5"		L20RS	2	SE40L	1	FLL20R
3.5"		L40RS	2	SE40L	1	FLL40R
<b>INTERNATIONAL</b>						
<b>72-82 Scout II, Terra, Traveler 4WD</b>						
2"		S20RS	2	SE40S	1	FLS20R
4"		S40RS	2	SE40S	1	FLS40R

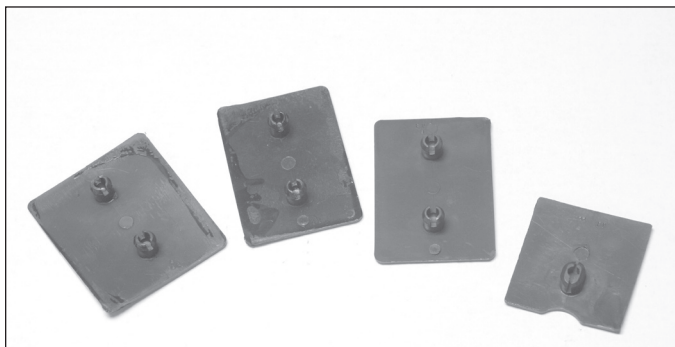

<b>LEAF SPRING ACCESSORIES</b>		
<b>Replacement Teflon® Wear Pads - Pair</b>		
<b>- Fits LEAF SPRING MODELS with 2", 2.5 or 3" Wide Leaf Springs.</b>		
Spring Width	Button Style	Part #
2"	Single	IN200C
2.5"	Single	IN212C
2.5"	Double	IN212D
2.5"	Off-Center	IN212O
3"	Single	IN300C
3"	Double	IN300D